

Jammer Testing and Integration



Emulate Interference Conditions and Threats

The CAST Navigation Jammers are designed to facilitate and support the testing, verification, and integration of single element Fixed Reception Pattern Antenna (FRPA) systems as well as multiple-element anti-jam antenna sub-systems such as Controlled Reception Pattern Antennas (CRPAs). These systems are an ideal solution for military and commercial laboratories where interference signal capability is required. CAST Jammer sub-systems provide precisely controlled signals for use in most types of GNSS testing applications. These testing applications can emulate interference conditions and threats that can occur in both urban and hostile environments.

System Features

- Control multiple interference parameters including jammer location, speed, heading, motion, output signal waveform types and power levels
- Waveforms are created using CAST proprietary FPGA technology, producing a clean waveform with high output power and very low intermodulation noise
- Each output element can be programmed to generate interference signals from several different locations and at different power-levels
- Ideal solution for military and commercial laboratories where an interference signal capability is desired

CAST interference generation systems let users define and control multiple interference parameters, including output signal waveform types, output power level, jammer signal source location, speed, heading and motion. Each of the individual jammers can also be programmed to turn on or off (pop-up) during the execution of a scenario. The systems can support up to 8 individual antenna output elements, with each individual antenna output element programmable to generate interference signals from different locations and different power levels.



Interference Modeling and Simulation

System Specifications

Output Frequency Bands L1, L2, L5

Jammer Vehicle Dynamics

Velocity: 1000 m/s
Acceleration: +/- 150,000 m/s²
Jerk: +/- 150,000 m/s³

Signal Level

Jammer Signal Range: 173dB
Jammer Signal Level: -203dBW to -30dBW

Signal Accuracy

Pseudorange: 1 mm
Pseudorange: Rate 1 mm/s
Delta Pseudorange: 1 mm
Interchannel Bias: < 1 mm
Uncontrolled Bias: < 1 mm
Bias Repeatability (initial): < 1 mm
Bias Stability (operational): < 1 mm

Modes of Operation

CW

Pulsed CW:

Rate: 0.01Hz-100KHz

Swept CW:

Rate: 0.01Hz-100KHz, Duty Cycle 1%-99%

Swept CW:


Sweep Types: Sinusoid, Triangle, Ramp Up/Down

Swept CW: Bandwidth: 0.01Hz – 24 MHz


FM Noise: Bandwidth: 0.00Hz – 20MHz

WB Noise: Bandwidth: 24MHz


Binary Phase Shift Key: Bandwidth 24MHz

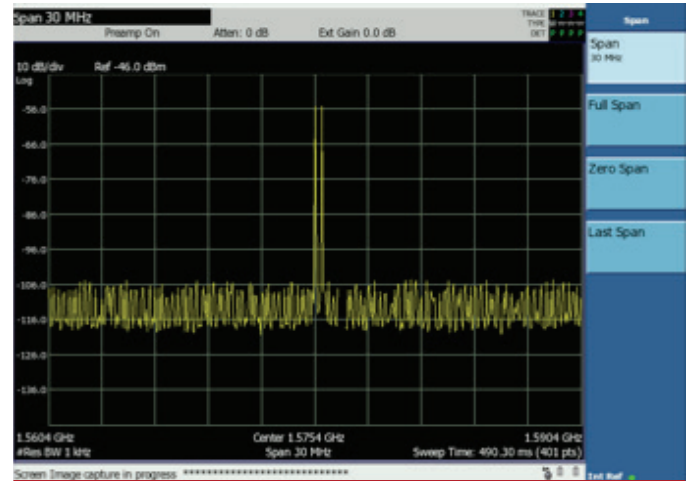

Example of CAST Dual CW Tone Waveform.

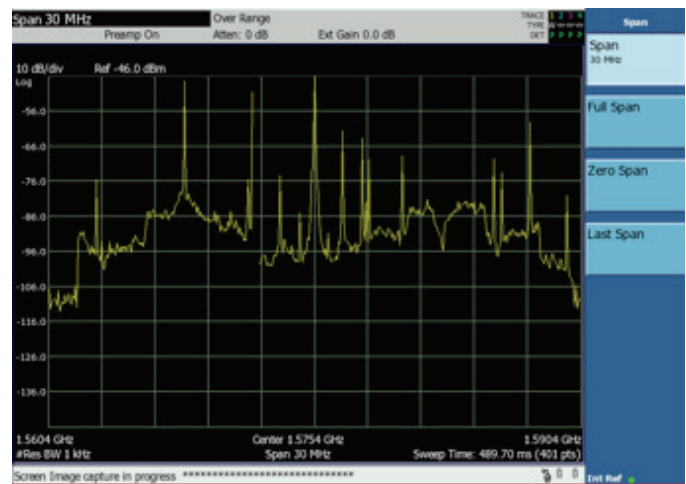

Example of Commercial CW Tone.

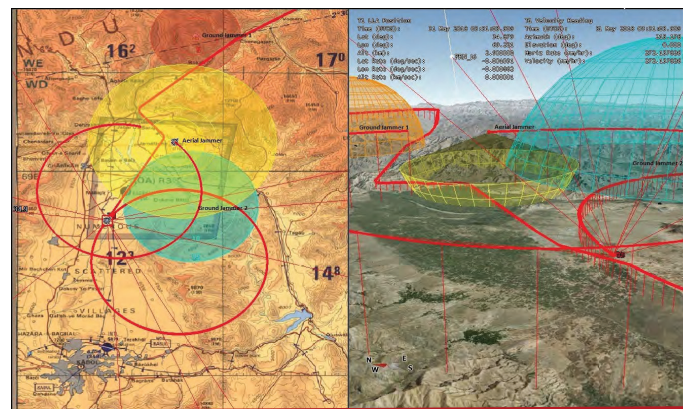

Simulation sample trajectory with range spheres.

CAST Navigation, LLC
One Highwood Drive, Suite 100
Tewksbury, MA 01876
Tel: 978 858-0130
Fax: 978 858-0170
Email: sales@castnav.com

Copyright © 2020 CAST Navigation, LLC. All Rights Reserved.
Specifications subject to change without notice.

CAST
NAVIGATION

CASTNAV.COM